

KLJF10T8XX2F



Advantages:

- 50,000 hours lifespan
- 5 years warranty
- No UV emission
- Suitable for damp or dry environments
- Mercury and lead free
- End to end mounting and wiring
- 80% more energy saving compared with traditional lamps
- 4ft linear fixture can be linkable up to 8ft linear fixture
- Easy and secure installation
- Uniformity lighting distribution

Technical Characteristics:

Color Temperature	3000K, 3500K, 4000K, 4500K, 5000K		
CRI	>80	Lens	Clear/ Frosted
Lumen	1050 LM	Light Source	SMD 2835
Input Power	15 W	Power Input	One end Input
Lumen Efficacy	130 Lm/W		
Rated Voltage	AC100-277V		
Power Factor	>0.9		
Beam Angle	120 Degree		
Working Frequency	50-60Hz		

Product Specifications:

Product name	LED Tube Light
Light Type	Internal Driver
Dimension	588x31.5x34 mm

Application:

- Supermarket lighting
- Workshop facility lighting
- Education facility lighting
- Airport and station lighting
- Other commercial applications

Technical Specifications

Listings:

Others

Warranty time: 5 years

To prevent injury or damage to property, this product must be installed in accordance to National Electrical Code (NFPA70) in the US or Canadian Electrical Code (CSA 22.1) in Canada.

Risk of fire or electric shock. The electrical rating of these products are 100-277 Vac, the installer must determine whether they have 100-277 V at the luminaire before installation.

Risk of fire or electric shock. UFO High Bay installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.

To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

Disconnect power before installing the product or servicing it.

Wait until fixture has cooled down before installing or servicing the fixture.

Min. 90°C Supply Conductors

Warranty Period assumes that the Products are operated for less than 8 hours per day.

XX means different color temperature as - 3K -3000K, 3K5-3500K, 4K-4000K, 4K5-4500K, 5K-5000K



Operating conditions:

Environmental Temperature	-10~30°C
Light On	8 Hours/day
Life Time	50000 Hours

KLJF10T8XX2F



Order Information

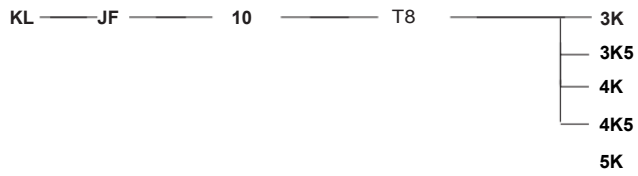

PACKAGE

Outer Carton : 1260x220x250 mm

Quantity : 30pcs/ CTN

