

KL14SDLXX12I



Advantages:

- > Unique design
- > Rebate is available.
- > 25000h long life time, 5 years warranty term.

Technical Characteristics:

Color Temperature	2700K, 3000K, 4000K, 5000K
CRI	>80
Lumen	1100 LM
Input Power	14 W
Lumen Efficacy	72 Lm/W
Input Voltage	120V AC 60Hz
Waterproof Rating	IP20
Dimmable	Yes
Lens	PS
Housing	Finish Steel Base
Dimension	12"DIA x3.74" H (305 x 305 x 95 mm)

Application:

Office, hotel, residential or commercial, decorative indoor luminaries

Technical Specifications

Listings:

ETL Listing



Energy Star Listing

Waterproof Rating - IP20

Others

Warranty time: 5 years

To prevent injury or damage to property, this product must be installed in accordance to National Electrical Code (NFPA70) in the US or Canadian Electrical Code (CSA 22.1) in Canada.

Risk of fire or electric shock. The electrical rating of these products are 100-277 Vac, the installer must determine whether they have 100-277 V at the luminaire before installation.

Risk of fire or electric shock. Installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.

To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

Disconnect power before installing the product or servicing it.



Wait until fixture has cooled down before installing or servicing the fixture.

Min. 90°C Supply Conductors

Warranty Period assumes that the Products are operated for less than 8 hours per day.

Operating conditions:

Operating Temperature	-20°C TO 45°C
Operating Humidity	20%- 90% RH
Storage Temperature	-30°C TO 80°C
Application	Indoor
Storage Humidity	10% - 95%RH

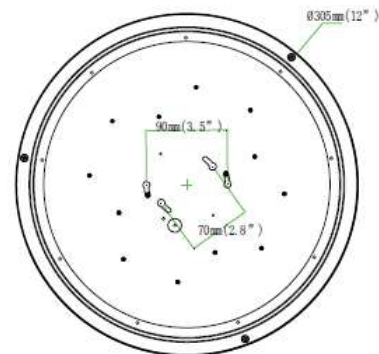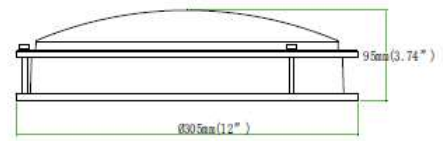

KL14SDLXX12I

Order Information

KL	Watt	SDL	CCT	SIZE
KL	14	SDL	30K: 3000K 40K: 4000K 50K: 5000K	12"

KL	14	SDL		
----	----	-----	--	--

PACKAGE

	Size	Qty/ Carton	G.W/ Carton
outer box	20.9"L x 13"W x 13.5"H (532mm x 332mm x 343mm)	5	6 kgs

