

KLBRFPL32W22-XX



Advantages:

- ETL certification with internal power supply
- Perfect light Uniformity
- 5 years warranty
- High efficiency: 125lm/w
- CRI: Ra>80
- Both dimmable & Non-dimmable
- Energy-saving & Super bright

Technical Characteristics:

Color Temperature	3000K, 4000K, 5000K
CRI	>80
Lumen	3520 lm & 4000 lm
Input Power	32W
Lumen Efficacy	110 - 125 LM/W
Input Voltage	100-277Vac 50/60Hz
Power Supply	Internal driver
Waterproof rating	IP40
Dimmable	Yes
Dimension	23.7" W x 23.7" L x 1" H
Beam angle	110 Degrees

Application:

- Hotels / Meeting Rooms
- Factories / Offices / Car parks / Schools
- Hospitals / Supermarkets / Railway Stations & Airports

Technical Specifications

Listings:

ETL listed

DLC listed

Waterproof Rating - IP40



Others

Warranty time: 5 years

To prevent injury or damage to property, this product must be installed in accordance to National Electrical Code (NFPA70) in the US or Canadian Electrical Code (CSA 22.1) in Canada.

Risk of fire or electric shock. The electrical rating of these products are 100-277 Vac, the installer must determine whether they have 100-277 V at the luminaire before installation.

Risk of fire or electric shock. Installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.

To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

Disconnect power before installing the product or servicing it.

Wait until fixture has cooled down before installing or servicing the fixture.


Min. 90°C Supply Conductors

Warranty Period assumes that the Products are operated for less than 8 hours per day.

Operating conditions:


Operating Temperature	-25°C TO 50°C
Operating Humidity	20% - 90% RH
Storage Temperature	-30°C TO 80°C
Application	Indoor light
Storage Humidity	10% - 95% RH

Lux Chart




Height	Average Lux (lx)	Light range (dia.)
1M	1024.0	306.4cm
2M	256.0	612.8cm
3M	113.8	919.2cm
4M	64.0	1225.7cm
6M	28.4	1838.5cm

Photometrics

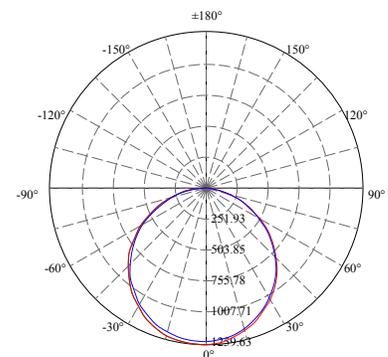


KLBRFPL32W22-XX

Order Information

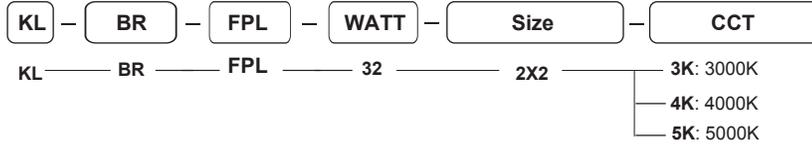



Package

1pcs/CTN G.W.:8 kg Dimension: 27.2"L x 28"W x 2.8"H (690mmx710mmx70mm)


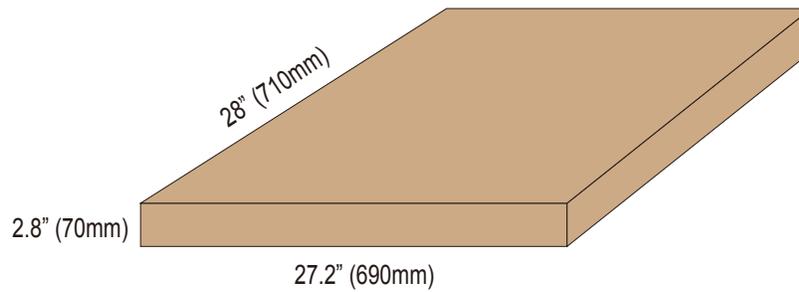


Installation Instructions

Residential Installation

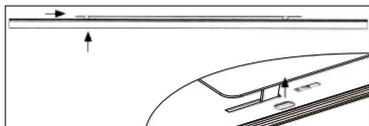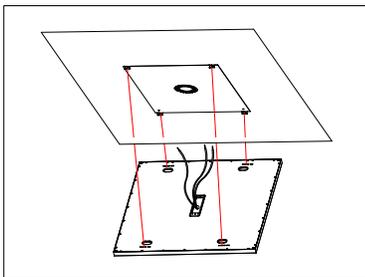

Suspension Installation-T Bar

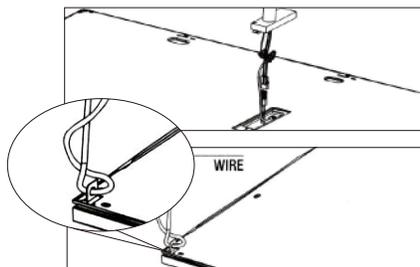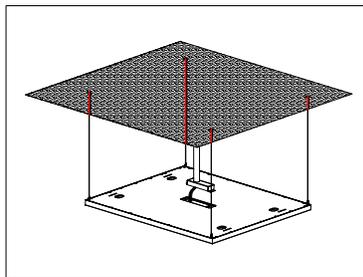

Recessed Installation-T Bar

