

# KLBRFPL32W14-XX



### Advantages:

- > ETL certification with internal power supply
- > Perfect light Uniformity
- > 5 years warranty
- > High efficiency: 125lm/w
- > CRI: Ra>80
- > Both dimmable & Non-dimmable
- > Energy-saving & Super bright

### Technical Characteristics:

Color Temperature	3000K, 4000K, 5000K
CRI	>80
Lumen	3520 lm & 4000 lm
Input Power	32W
Lumen Efficacy	110 - 125 LM/W
Input Voltage	100-277Vac 50/60Hz
Power Supply	Internal driver
Waterproof rating	IP40
Dimmable	Yes
Dimension	11.8" W x 47.8" L x 1" H
Beam angle	110 Degrees

### Application:

- > Hotels / Meeting Rooms
- > Factories / Offices / Car parks / Schools
- > Hospitals / Supermarkets / Railway Stations & Airports

### Technical Specifications

#### Listings:

ETL listed

Waterproof Rating - IP40



#### Others

Warranty time: 5 years

To prevent injury or damage to property, this product must be installed in accordance to National Electrical Code (NFPA70) in the US or Canadian Electrical Code (CSA 22.1) in Canada.

Risk of fire or electric shock. The electrical rating of these products are 100-277 Vac, the installer must determine whether they have 100-277 V at the luminaire before installation.

Risk of fire or electric shock. Installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.

To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

Disconnect power before installing the product or servicing it.

Wait until fixture has cooled down before installing or servicing the fixture.


Min. 90°C Supply Conductors

Warranty Period assumes that the Products are operated for less than 8 hours per day.

### Operating conditions:


Operating Temperature	-25°C TO 50°C
Operating Humidity	20%- 90% RH
Storage Temperature	-30°C TO 80°C
Application	Indoor light
Storage Humidity	10%- 95% RH

### Lux Chart




Height	Average Lux (lx)	Light range (dia.)
1M	1021.5	313.3cm
2M	255.4	626.5cm
3M	113.5	939.8cm
4M	63.8	1253.1cm
6M	28.4	1879.6cm

### Photometrics

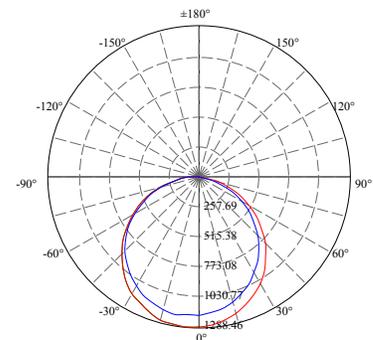


# KLBRFPL32W14-XX

## Order Information

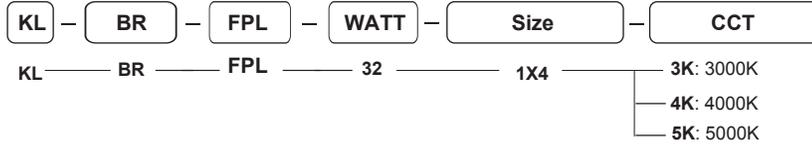



## Package

1pcs/CTN G.W.:8 kg Dimension: 13.8"L x 50.2"W x 2.8"H (350mmx1275mmx70mm)


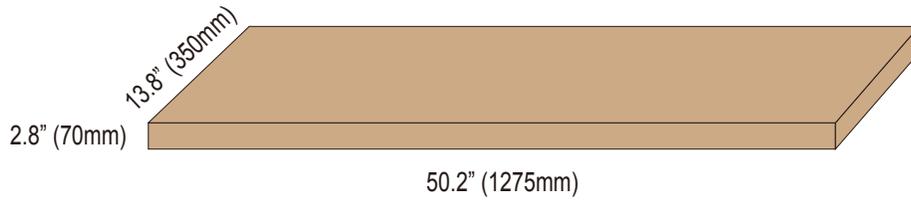


## Installation Instructions

### Residential Installation

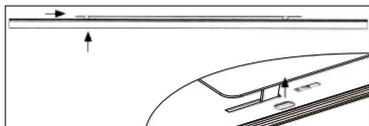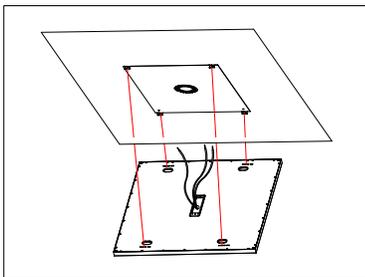

### Suspension Installation-T Bar

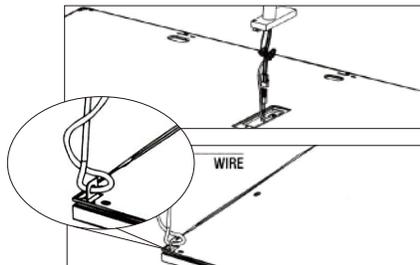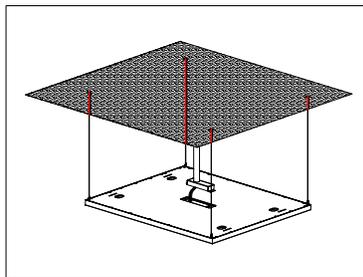

### Recessed Installation-T Bar

