


KLBR40STPXX48

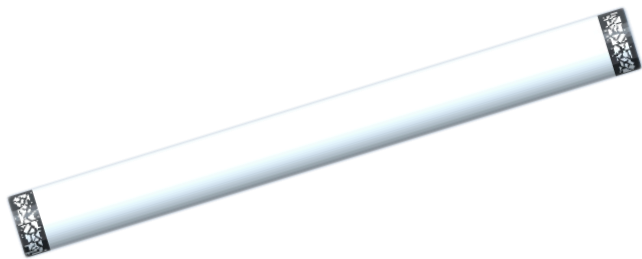

Technical characteristics

Color Temp:	30K, 40K, 50K	Housing	Steel base with White Powder Coating
CRI	>80		
Lumen	4200LM		
Input Power	40W		
Beam Angle	116°		
Input Voltage	100-200Vac		
PFC	>90		
Light efficacy	100 lumen/watt		
Waterproof rating	IP20		

Advantage


- Easy installation to save labor cost.
- High lumen efficacy to save energy.
- ETL & DLC
- 50000h long life time, 5 years warranty term.

Application

Luminaires for Ambient Lighting of Interior Commercial Spaces
Vanity Lights

Dimensions

48"L X 5"W X 3.28"H(1219.6X127X83.69mm)

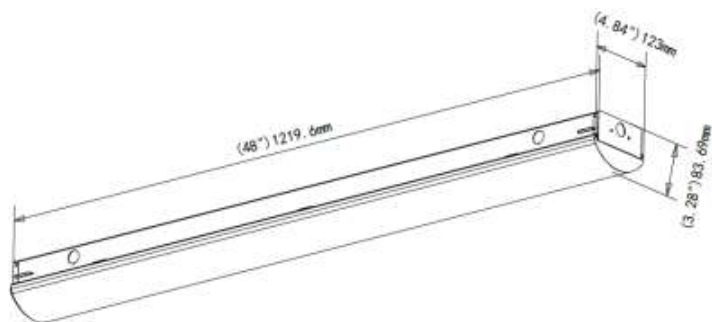

Operating conditions:

Operating Temperature	-20°C TO 55°C
Operating Humidity	20%- 90% RH
Storage Temperature	-30°C TO 80°C
Application	Indoor
Storage Humidity	10%- 95%RH

Order Information


<input type="text" value="KL"/>	-	<input type="text" value="BR"/>	-	<input type="text" value="WATT"/>	-	<input type="text" value="STP"/>	-	<input type="text" value="CCT"/>	-	<input type="text" value="Size"/>
KL		BR		40		STP		30K: 4000K 40K: 4500K 50K: 5000K		48"

<input type="text" value="KL"/>	-	<input type="text" value="BR"/>	-	<input type="text" value="40"/>	-	<input type="text" value="STP"/>	-	<input type="text"/>	-	<input type="text"/>
---------------------------------	---	---------------------------------	---	---------------------------------	---	----------------------------------	---	----------------------	---	----------------------


KLBR40STPXX48

Packing Information

1 pcs/CTN G.W : 3.35 kg Dimension : 48.8"L X 5.3"W X 3.7"H (1240 X 134.62 X 93.98 mm)

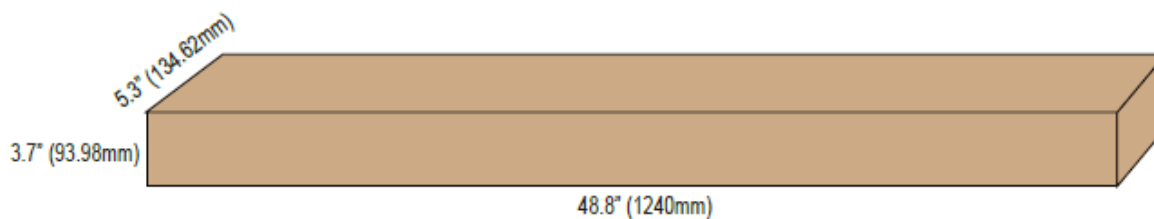

Accessories (Optional)



Part 1



Part 2



Part 3



Part 4



Part 5



Part 6



Part 7