

# KLBR42BNXX-GN



### Advantages:

- Unique design
- Rebate is available
- 50000h long life time
- 5 years warranty term

### Technical Characteristics:

Color Temp:	3000K, 4000K, 5000K	Lens	Clear Lens
CRI	>80	Photocell	With or without photocell
Lumen	4000 LM		
Input Power	42 W		
Viewing Angle	360°		
Input Voltage	100-277 VAC, 50/60HZ		
Lumen Efficacy	>95 Lm/W		
Dimmable	No dimmable		
Waterproof Rating	IP65		
Life span	50000Hrs		

### Product Specifications:

Product name	LED Wall-Mounted Barn Light
Light Type	Street Light
Dimension	15"L X 14"W X 24"H (380 x 360 x 600 mm)

### Application:

- Outdoor or indoor Wall-Mounted Area Luminaires

### Technical Specifications

#### Listings:

ETL Listing:



ENERGY STAR

IP65: Suitable for wet locations

#### Others

#### Warranty time: 5 years

To prevent injury or damage to property, this product must be installed in accordance to National Electrical Code (NFPA70) in the US or Canadian Electrical Code (CSA 22.1) in Canada.

Risk of fire or electric shock. The electrical rating of these products are 100-277 Vac, the installer must determine whether they have 100-277 V at the luminaire before installation.

Risk of fire or electric shock. UFO High Bay installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.

To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

Disconnect power before installing the product or servicing it.

Wait until fixture has cooled down before installing or servicing the fixture.

Min. 90°C Supply Conductors

Warranty Period assumes that the Products are operated for less than 8 hours per day.

XX means different color temperature as - 2K7-2700K, 3K-3000K, 4K-4000K, 4K5-4500K, 5K-5000K, 5K7-5700K



### Operating conditions:

Max Operating temperatures: -40°C TO 50°C

Application: Outdoor/Indoor

Operating Humidity: 20%- 90% RH

Storage Temperature: -30°C TO 80°C

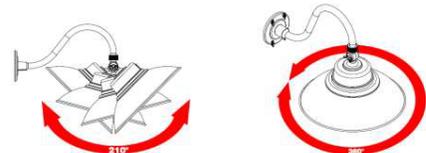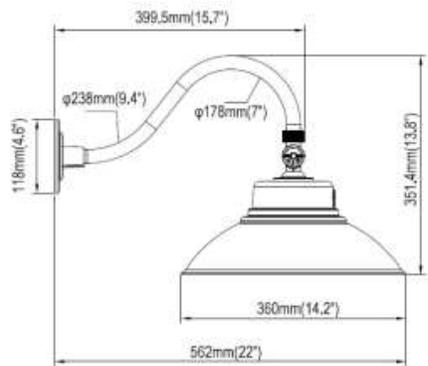

# KLBR42BNXX-GN



## Order Information

KL - BR - WHATT - BN - Color Temp

KL - BR - 42 - BN - 3K  
4K  
5K

KL - BR - 42 - BN -

## Package

Package	Size	G.W
2pcs/CTN	652 x 284 x 430mm	5.7 KGS

