

KL-PAR38-XXYYZZCCTTP



Advantages:

- Long Life
- Energy Efficiency
- Ecologically Friendly
- Durable Quality
- Design Flexibility
- Operational in Extremely Cold or Hot Temperatures
- Instant Lighting, Low Voltage & Frequent Switching

Technical Characteristics

Color Temp:	27K, 30K, 40K, 50K	LED Quantity	280 pcs.
CRI	>90	Housing	PC+AL
Lumen	1200LM		
Input Power	6W		
Viewing Angle	36°		
Input Voltage	110-200Vac		
PFC	>90		
Light efficacy	80 lumen/watt		
Equivalent	80W equivalent Halogen Bulb		

Application:

- Track Lights, Recessed Down lights, Display Lights

Technical Specifications

Listings

UL Listing:

UL code: E472587



Others

Warranty time: 5 years

To prevent injury or damage to property, this product must be installed in accordance to National Electrical Code (NFPA70) in the US or Canadian Electrical Code (CSA 22.1) in Canada.

Risk of fire or electric shock. The electrical rating of these products are 100-277 Vac, the installer must determine whether they have 100-277 V at the luminaire before installation.

Risk of fire or electric shock. Installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.

To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

Disconnect power before installing the product or servicing it.

Wait until fixture has cooled down before installing or servicing the fixture.

Min. 90°C Supply Conductors

Warranty Period assumes that the Products are operated for less than 8 hours per day.

Operating conditions

Max Operating temperatures:
105°F

Application:

Outdoor/Indoor

Life Span:

25K hours

KL-PAR38-XXYYZZCCTTP

Order Information


KL - PAR38 - WATT - XXYYZZCCTTP - CCT

KL — PAR38 — 6 — XXYYZZCCTTP — 30K: 4000K
 — 40K: 4500K
 — 50K: 5000K


KL - PAR38 - 6 - XXYYZZCCTTP -

Packaging

Model No	Dimension (LxWxH mm)	Carton (LxWxH mm)	Pc/ Ctn
KL-PAR38-XXYYZZCCTTP	128x128x135	525x400x285	24

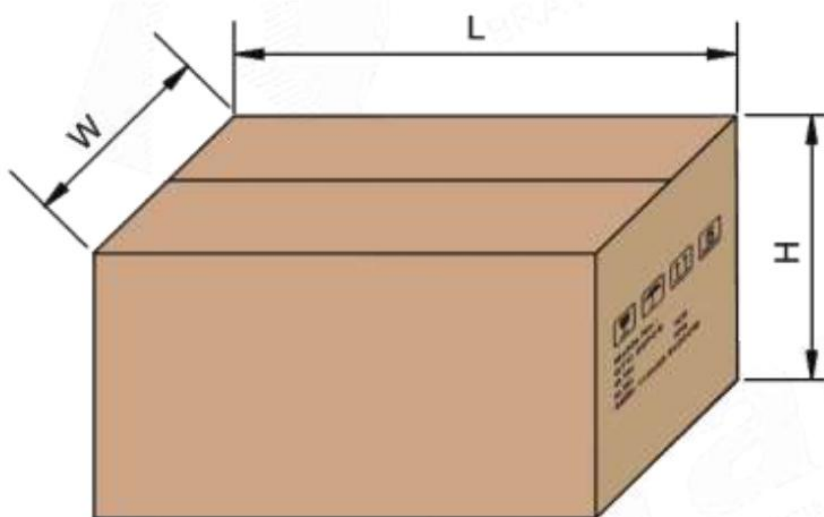

Carton



Inner Box