

# KLBR06FDLXX4I



### Advantages:

- Easy installation to save labor cost.
- High lumen efficacy to save energy.
- Energy Star and ETL listed
- 50000h long life time, 3 years warranty term.

### Technical Characteristics

Color Temp:	3K, 45, 5K
Lumen	500 LM
Input Power	6W
Beam Angle	120°
Input Voltage	120V AC
CRI	>80
Waterproof Rating	IP20

### Application:

Indoors

Office, hotels, residential and commercial luminaire

Housing Color: White

### Technical Specifications

#### Listings

Energy star listed

ETL Listed

IP20 Water proof rating



#### Others

**Warranty time:** 3 years

To prevent injury or damage to property, this product must be installed in accordance to National Electrical Code (NFPA70) in the US or Canadian Electrical Code (CSA 22.1) in Canada.

Risk of fire or electric shock. The electrical rating of these products are 100-277 Vac, the installer must determine whether they have 100-277 V at the luminaire before installation.

Risk of fire or electric shock. Installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.

To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

Disconnect power before installing the product or servicing it.

Wait until fixture has cooled down before installing or servicing the fixture.

Min. 90°C Supply Conductors

Warranty Period assumes that the Products are operated for less than 8 hours per day.

### Operating conditions

#### Operating temperatures:

-25°C TO 55°C

#### Operating Humidity:

20%-90% RH

#### Storage Temperature

-30°C TO 80°C


#### Storage Humidity:

10%- 90% RH

#### Application:

Indoor

### Dimensions

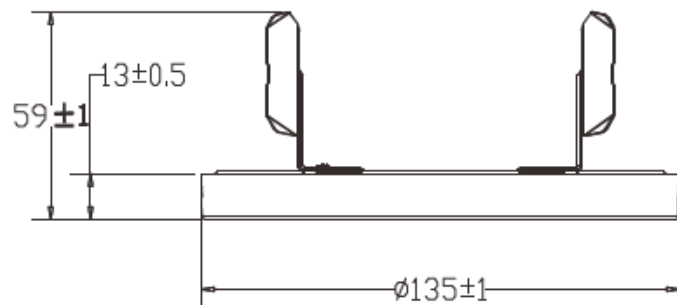


# KLBR06FDLXX4I

## Order Information




## Packaging Information


60pcs/CTN Dimension: 12"L x 11.6"W x 11.8"H (305mmx295mmx300mm)

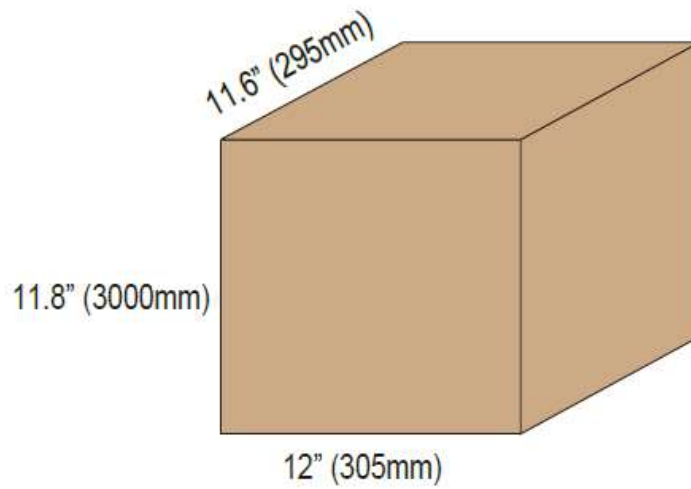

## Installation

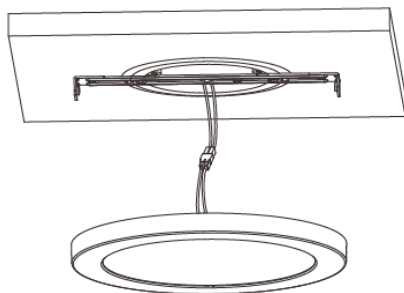

J-BOX Mount

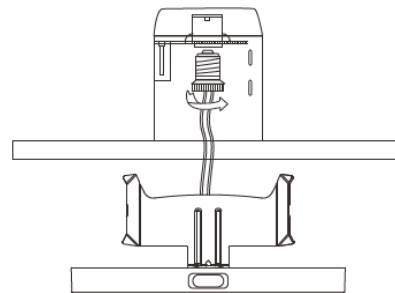

4" Retrofit