

KLSN75CPXX-LYRA1



Advantages:

- UL, DLC certificate;
- IP65 Internal driver, Input voltage 100-277Vac;
- No UV or IR in the beam;
- Easy to install and operate;
- Energy saving, long lifespan;
- Instant start, NO flickering, NO humming;
- Green and eco-friendly without mercury



Technical Characteristics

Color Temp:	4K, 4K5, 5K	Housing	Aluminum + PC
CRI	>80	LED Type	SMD2835 (0.5W)
Lumen	9400-10000 LM	LED Qty	225 PCS
Lumen Efficacy	127-133 LM/W		
Input Power	75W		
Viewing Angle	160°		
Input Voltage	100-277Vac 50/60Hz		
PF	≥0.9		
Driver Model	China Brand Driver		
Waterproof Rating	Wet (IP 65)		

Application:

- Canopy Lighting
- Underground car parking lots
- Garage

Housing Color: White

Technical Specifications

Listings

UL Listing:


UL code: E473338

DLC Listed

IP65: Suitable for wet locations



Dimensions

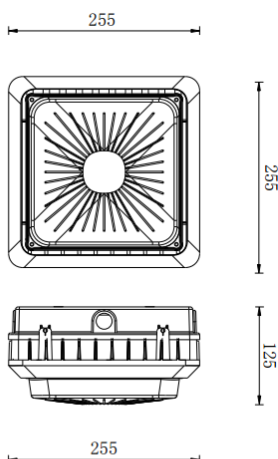

Operating conditions

Operating temperatures:

-20°C TO 45°C

Operating Humidity:

20%-90% RH

Storage Temperature

-30°C TO 80°C

Storage Humidity:

10%- 95% RH

Application:

Outdoor

Others

Warranty time: 5 years

Notice for Users

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- No-professionals, must not install and disassemble the lamps.

KLSN75CPXX-LYRA1

Order Information

KL - SN - WATT - CP - CCT - LYRA1


KL - SN - 75 - CP - 4K
 4K5
 5K

KL - SN - 75 - CP - [] - []


Package

Lamp Net Weight: 3.0 KG / PC

	Size	Qty / Carton	Gross Weight / Carton
Inner box	305*300*185 MM	1 PC	3.5 KG
Outer box	390*315*325 MM	2 PCS	7.8 KG

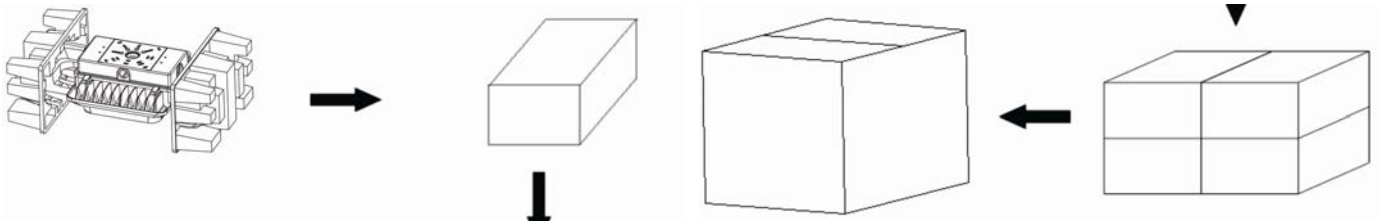

Lux Chart

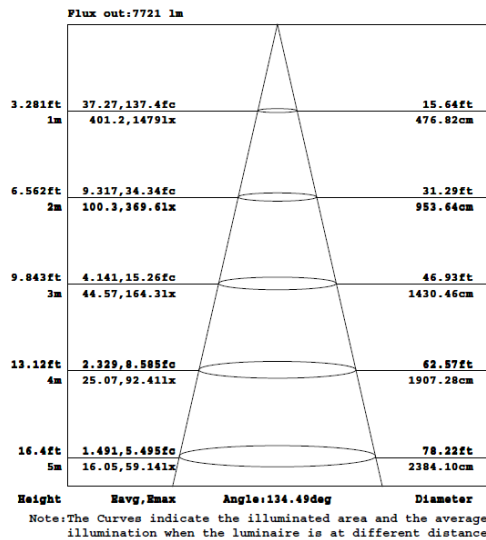

Photometrics

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

