

Note : The Letter below in P/N stands for

KL60SB-MPL211[1,2,3]

- 01 : ADJUSTABLE FITTER MOUNTING
- 02 : DIRECT MOUNTING
- 03 : YOKE MOUNTING



Advantages:

- UL, DLC certificate
- PHILIPS Chip, high CRI
- SONG SHENG IP65 driver, input voltage 100-277VAC
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury.

Technical Characteristics:

Color Temperature	4000K, 5000K, 5700K	LED Brand	PHILIPS
CRI	>70	Driver	SS-75H-48(SONG SHENG Driver)
Lumen	7500-7800LM	LED Type	3030, 1.5W
Input Power	60W	LED QTY	70 PCS
Input Voltage	100-277Vac 50/60Hz	Housing color	Black
PFC	>0.9	Housing	Magnesium + Aluminum
Viewing Angle	150*85 Degree (Type III)	Waterproof Rating	IP65

Product Specifications:

Product name	LED Shoebox Light		
Light Type	Shoebox Light		
Dimension	377x388x80mm	377x407.4x89.2mm	377x345.3x87.4mm
	Adjustable Fitter	Direct Mounting	Yoke Mounting

Application:

- Outdoor basketball court, tennis court.
- Badminton court, the football field.
- The school playground, stadium.
- Community leisure entertainment plaza, road lamp etc.

Technical Specifications

Listings:

DLC Listing



UL Number : E473338

UL Number : E473338

Waterproof Rating - IP65

Others

Warranty time: 5 years

To prevent injury or damage to property, this product must be installed in accordance to National Electrical Code (NFPA70) in the US or Canadian Electrical Code (CSA 22.1) in Canada.

Risk of fire or electric shock. The electrical rating of these products are 100-277 Vac, the installer must determine whether they have 100-277 V at the luminaire before installation.

Risk of fire or electric shock. Installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.

To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

Disconnect power before installing the product or servicing it.

Wait until fixture has cooled down before installing or servicing the fixture.

Min. 90°C Supply Conductors


Warranty Period assumes that the Products are operated for less than 8 hours per day.

XX means different color temperature as - 3K -3000K, 3K5-3500K, 4K-4000K, 4K5-4500K, 5K-5000K


Operating conditions:

Operating Temperature	-20°C TO 45°C
Operating Humidity	20%- 90% RH
Storage Temperature	-30°C TO 80°C
Application	Outdoor
Storage Humidity	10%- 95%RH


[Adjustable Fitter Mounting]

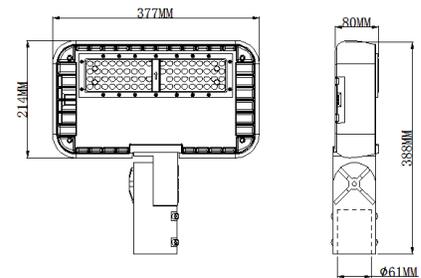

[Yoke Mounting]

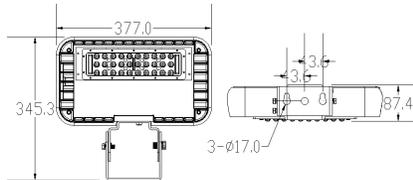

[Direct Mounting]

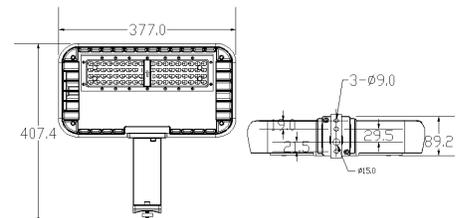

KL60SB-MPL211[1,2,3]

Note : The Letter below in P/N stands for


01 : ADJUSTABLE FITTER MOUNTING

02 : DIRECT MOUNTING

03 : YOKE MOUNTING



Order Information

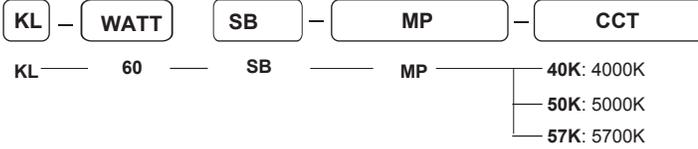

PACKAGE

Lamps Net Weight: 5.8 Kg/ pc

	Size	Qty/ Carton	Weight/ Carton
outer box	450x435x135mm	1	6.6kg

